


GS42P

GUARDSAFE® 42P BARRICADE

OVERVIEW

- Meets MASH TL-2 Criteria - pending FHWA eligibility*
- Water-Filled Longitudinal Channelizing Device
- Threaded 6" Fill Port and two 2" drains at bottom
- Connect and Rotate 90 degrees using Pins
- Accepts Rolled Fence and/or Fence Panels
- 2 Forklift Pockets at Base
- Light Pocket
- OPTIONAL: custom colors and graphics

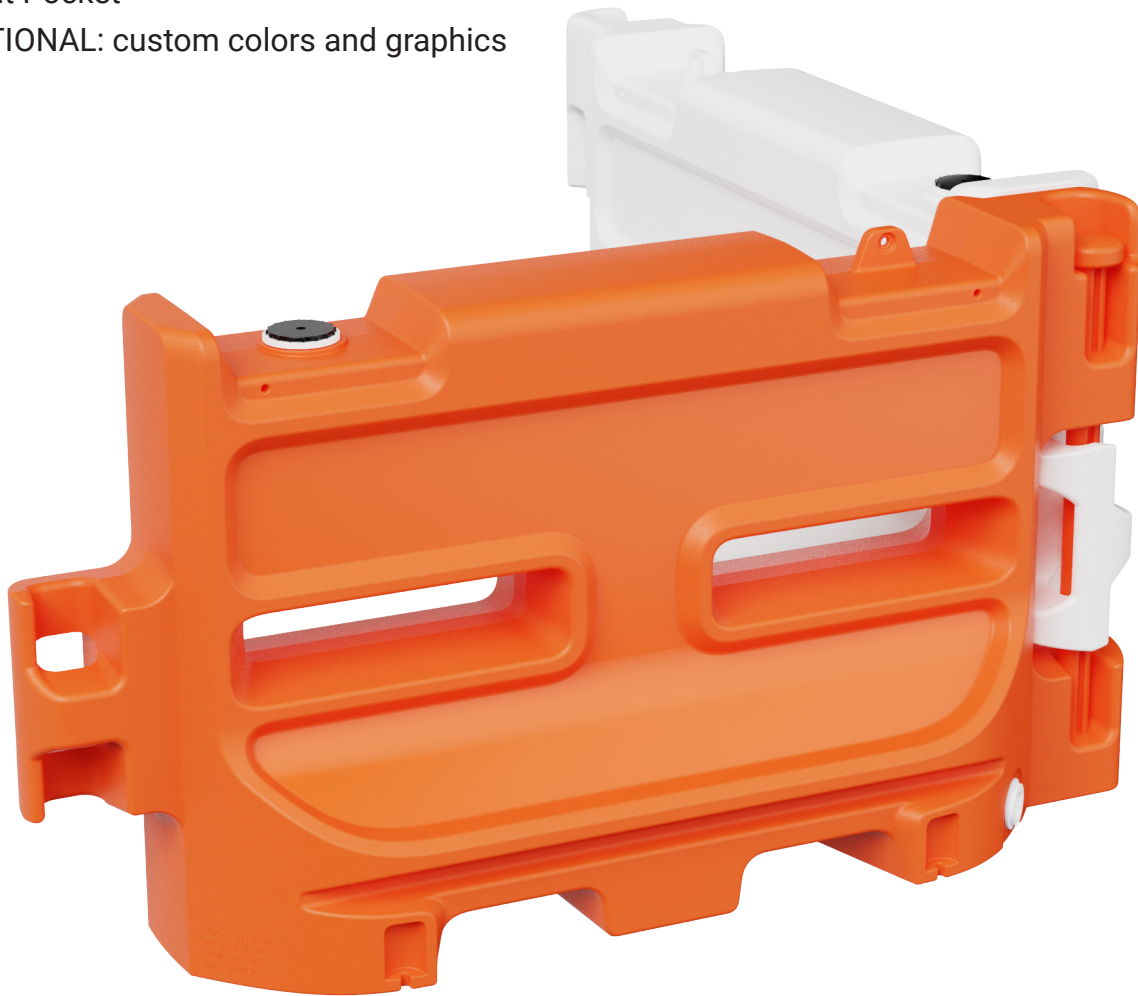


| PRODUCT DESCRIPTION | LENGTH IN | WIDTH IN | HEIGHT IN | WEIGHT lbs |
|---------------------|-----------|----------|-----------|------------|
| GUARDSAFE 36 LCD | 72 | 24 | 42 | 90 |

| INCHES OF WATER | U.S. LBS | U.S. GALLONS | CUBIC FEET |
|-----------------|----------|--------------|------------|
| 15 | 547.2 | 65.8 | 8.8 |
| 12 | 467.8 | 56.3 | 7.5 |
| 9 | 356.4 | 42.9 | 5.7 |
| 6 | 215.4 | 25.9 | 3.5 |
| 3 | 85.6 | 10.3 | 1.4 |

FILL PORT

3" threaded cap with grip features.

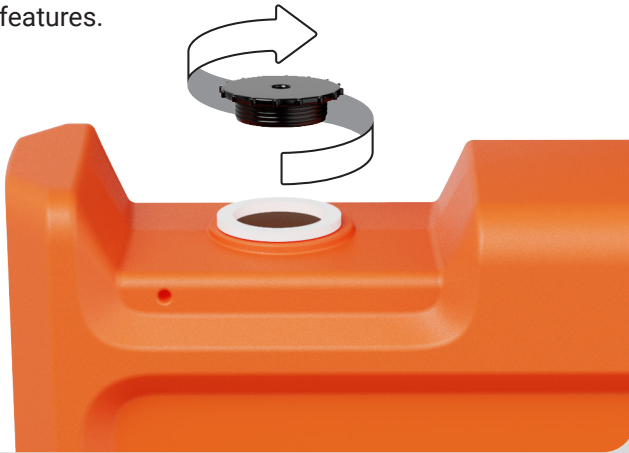


DRAIN PLUG

1 per side. Safe drainage away from traffic. 2" threaded cap. Requires 2" Bung Wrench to remove.

FENCING

Barricades accept fencing at the hinge point, providing same articulation that the pins allow.

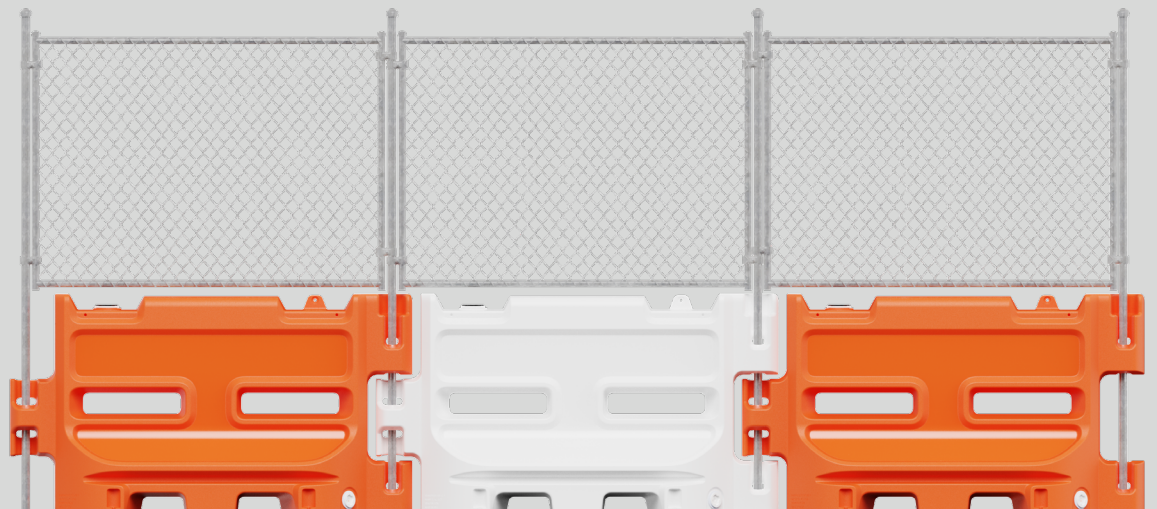

*GS42P with fencing has not been MASH tested.